

## CISCO VOICE SWITCH SERVICE MODULE

The Cisco® Voice Switch Service Module (VXSM) is a high-density voice module for the Cisco MGX® 8880 Media Gateway and Cisco MGX 8000 Series multiservice switches. The Cisco VXSM offers high availability, scalable and robust voice features for wireless, wireline, cable applications.


### PRODUCT OVERVIEW

The Cisco VXSM is a high-density voice service module with time-division multiplexing (TDM) interfaces ranging from T1/E1 to Channelized OC-3/STM-1 (refer to Figure 1). It provides service providers' with carrier-class capabilities for high capacity and reliability for voice over IP (VoIP) services. The Cisco VXSM supports up to 8064 DS-0s and has the ability to protect active voice calls if scheduled or unscheduled outages occur.

The Cisco VXSM architecture combines a high-performance voice services engine with onboard digital signal processors to provide advanced voice processing and features that allow quick development and deployment of VoIP services. The Cisco VXSM offers carrier-grade voice quality with a full suite of voice, modem, and fax features. The Cisco VXSM, together with a softswitch, provides maximum deployment flexibility for various packet voice networks based on the Media Gateway Control Protocol (MGCP), PacketCable™ Trunking Gateway Control Protocol (TGCP), H.248, H.323, and the Session Initiation Protocol (SIP).

The innovative Cisco VXSM architecture provides investment protection with its ability to easily add new functions and services through software upgrades.

Figure 1. Cisco VXSM (Front and Back Cards)

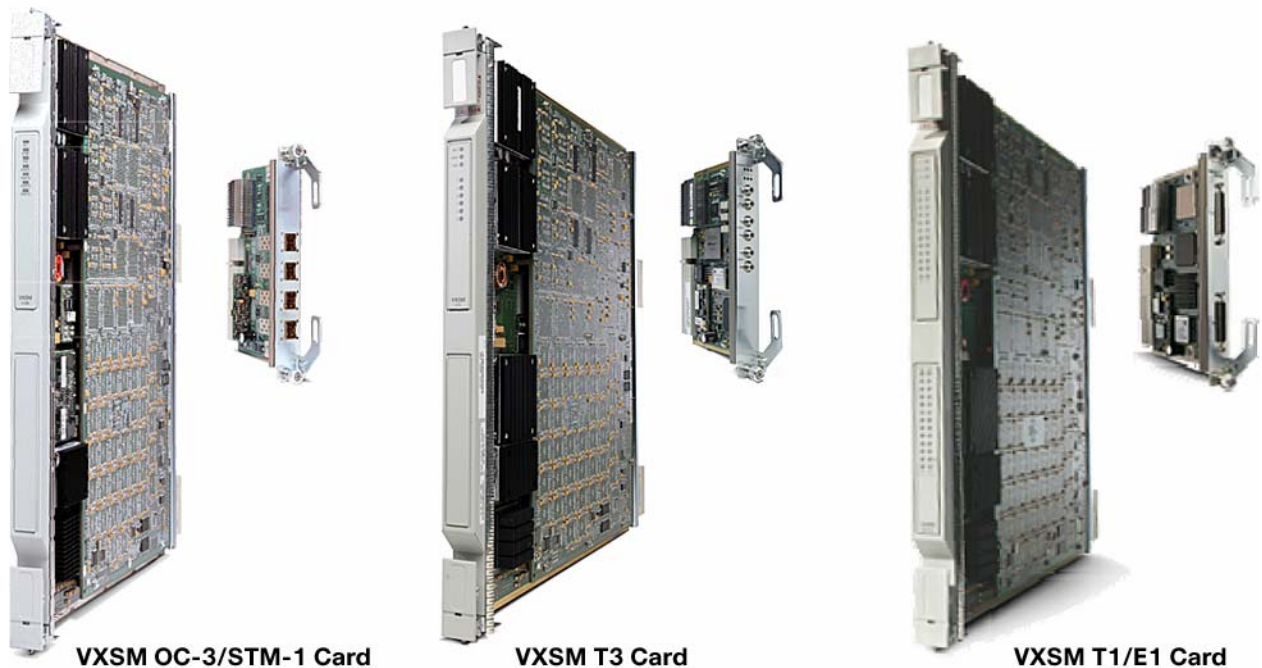

## FEATURES AND BENEFITS

Table 1 provides features and benefits, Table 2 provides an overview of the features, and Table 3 provides specifications of the Cisco VXSM.

**Table 1.** Features and Benefits of Cisco VXSM

Feature	Benefit
<b>High Density</b>	<ul style="list-style-type: none"> <li>• Scales up to 8064 VoIP DS-0s per service module</li> <li>• Lowers capital expenditures (CapEx) and operating expenses (OpEx) by maximizing density per platform</li> <li>• Allows 40,320 VoIP DS-0s per chassis and 120,960 VoIP DS-0s per rack, with echo cancellation</li> </ul>
<b>TDM Interfaces</b>	<ul style="list-style-type: none"> <li>• Offers scalable optical interfaces; available with 2- or 4-port OC-3/STM-1 interfaces per service module</li> <li>• Provides scalable electrical interfaces; up to 6 T3 interfaces per service module</li> <li>• Provides scalable electrical interfaces; up to 48 T1/E1 interfaces per service module</li> </ul>
<b>High Availability</b>	<ul style="list-style-type: none"> <li>• Ensures carrier-class reliability by providing active call preservation</li> </ul>
<b>Integrated Nonblocking Architecture</b>	<ul style="list-style-type: none"> <li>• Lowers entry, scaling, and operations cost by integrating TDM, network processing, and digital-signal-processor (DSP) technology onto a single module</li> </ul>

**Table 2.** Overview of Cisco VXSM Features

Features	Description
<b>Call Control</b>	<ul style="list-style-type: none"> <li>• H.248, MGCP, TGCP</li> </ul>
<b>Signaling Interfaces</b>	<ul style="list-style-type: none"> <li>• Signaling System 7 (SS7) and Inter-Machine Trunk (IMT); ISDN Primary Rate Interface (PRI)</li> <li>• Channel Associated Signaling (CAS) for E911(FGD, CAMA) and BLV/OI</li> </ul>
<b>Voice Compression</b>	<ul style="list-style-type: none"> <li>• G.711, G.726, G.729a/b, Clear Channel</li> </ul>
<b>Voice Features</b>	<ul style="list-style-type: none"> <li>• G.165, G.168-2000 integrated, nonblocking echo cancellation; programmable up to 128 ms</li> <li>• Transparent transcoding between a-law and <math>\mu</math>-law encoding</li> <li>• Voice Activity Detection, Silence Suppression, and Comfort Noise Generation</li> <li>• Fixed and Adaptive Jitter Buffering</li> <li>• Tone detection and regeneration including dial tone, busy, ring back, and congestion with local country variants; programmable tones</li> <li>• Dual Tone Multi Frequency (DTMF) relay (RFC 2833)</li> </ul>
<b>Modem and Fax</b>	<ul style="list-style-type: none"> <li>• Fax and modem pass-through</li> <li>• T.38 Fax Relay</li> <li>• TTY/TDD</li> </ul>
<b>IP</b>	<ul style="list-style-type: none"> <li>• Real-time Transport Protocol (RTP) (RFC 1889), DTMF Relay (RFC 2833), Differentiated Services (DiffServ) aware, MPLS</li> </ul>
<b>ATM</b>	<ul style="list-style-type: none"> <li>• Standards-based ATM Adaptation Layer 2 (AAL2) and ATM Adaptation Layer 5</li> </ul>
<b>Announcements</b>	<ul style="list-style-type: none"> <li>• Onboard announcement storage and payout</li> </ul>
<b>Lawful Intercept</b>	<ul style="list-style-type: none"> <li>• Lawful intercept (Communications Assistance for Law Enforcement Act [CALEA]) support for call content</li> <li>• Bearer encryption</li> </ul>

Features	Description
<b>Packet Cable</b>	<ul style="list-style-type: none"> <li>• PacketCable 1.1 Compliance</li> <li>• PacketCable bearer encryption</li> <li>• IPSec signaling encryption</li> </ul>
<b>Management Interfaces</b>	<ul style="list-style-type: none"> <li>• Simple Network Management Protocol (SNMP)</li> <li>• Command Line Interface (CLI)</li> <li>• Telnet</li> <li>• Secure Shell (SSH) Protocol</li> <li>• FTP</li> </ul>

**Table 3.** Product Specifications

Features	Specifications
<b>Chassis Compatibility</b>	<ul style="list-style-type: none"> <li>• Cisco MGX 8880 Media Gateway</li> <li>• Cisco MGX 8850 (with PXM-45)</li> </ul>
<b>Physical Specifications</b>	<ul style="list-style-type: none"> <li>• Front Card <ul style="list-style-type: none"> <li>– Height: 15.65 in. (397.51 mm)</li> <li>– Depth: 15.83 in. (402.08 mm)</li> </ul> </li> <li>• Back Card <ul style="list-style-type: none"> <li>– Height: 7 in. (177.8 mm)</li> <li>– Depth: 4.125 in. (104.76 mm)</li> </ul> </li> <li>• Environmental <ul style="list-style-type: none"> <li>– -32° to 104°F (0° to 40°C) for normal operation</li> <li>– Operating humidity (noncondensing): 10 to 85 percent</li> </ul> </li> </ul>
<b>Power Consumption</b>	110 to 160W
<b>Compliance</b>	<ul style="list-style-type: none"> <li>• Safety <ul style="list-style-type: none"> <li>– BellCore NEBS: Level 3</li> <li>– UL 1950, CSA C22.2 No. 950</li> <li>– AS/NZS 3260/ACA Approval</li> <li>– IEC 60825-1, EN60825-1</li> <li>– IEC 825-1</li> <li>– IEC 60950/EN 60950/TUV/CE mark</li> <li>– UL 60950</li> <li>– BABT: Telecom Requirement</li> <li>– ETS 300 047 : Telecom Standard</li> </ul> </li> <li>• EMI/ESD <ul style="list-style-type: none"> <li>– 47 CFR Part 15: 2002</li> <li>– CISPR22: 1997</li> <li>– EN55022: 1998</li> <li>– EN61000-3-2: 2000</li> <li>– EN61000-3-3: 1995</li> <li>– EN300386: 2001</li> <li>– VCCI: V-3/2000.04</li> </ul> </li> </ul>

Features	Specifications
	<ul style="list-style-type: none"> <li>- EN300386: 2001</li> <li>- EN50082-1: 1992</li> <li>- EN50082-1: 1997</li> <li>- EN61000-6-1: 2001</li> <li>- Central Office Equipment (USA only) GR1089: Issue2: Rev1: 1999 and GR1089: Issue 3: October 2002</li> <li>• SONET <ul style="list-style-type: none"> <li>- Bellcore GR-253-Core (GR for SONET transports)</li> <li>- ANSI T1.105 (SONET: Network element timing and synchronization)</li> </ul> </li> <li>• SDH <ul style="list-style-type: none"> <li>- G.707</li> <li>- G.957</li> <li>- G.783</li> </ul> </li> <li>• T3 <ul style="list-style-type: none"> <li>- T1.101, T1.403, T1.404, G.704</li> </ul> </li> <li>• T1 <ul style="list-style-type: none"> <li>- TIA-968-A 2002 (USA)</li> <li>- CS-03 Issue 8 1996 (Canada)</li> <li>- T1.101 / T1.403</li> </ul> </li> <li>• E1 <ul style="list-style-type: none"> <li>- RTTE Directive (1999/5/EC) 1999 (CE)</li> <li>- G.703</li> </ul> </li> </ul>
<b>Indicators</b>	LED for module and interface status

## CISCO VXSM OC-3/STM-1 INTERFACE

Cisco VXSM OC-3/STM-1 back cards use the Cisco industry-standard Small Form-Factor Pluggable (SFP) modules. SFPs minimize operations and sparing costs by allowing Cisco VXSM OC-3/STM-1 back cards to be easily adapted to various types of optical interfaces. For example, a Cisco VXSM OC-3/STM-1 back card with Multi-Mode Fiber (MMF) interfaces can be quickly changed to Single-Mode Fiber (SMF) by removing the MMF modules and inserting SMF modules. Table 4 provides information about the Cisco VXSM OC-3/STM-1 back card interfaces.

**Table 4.** Cisco VXSM OC-3/STM-1 Back-Card Interfaces

	MMF	SMF Intermediate Reach (SMF-IR)	SMF Long Reach (SMF-LR)
<b>Port Speed</b>	155 Mbps	155 Mbps	155 Mbps
<b>Maximum Number of Ports</b>	4	4	4
<b>Port Media</b>	MMF	SMF	SMF
<b>Port Connector</b>	LC	LC	LC
<b>Optics</b>	LED 1310 nm	Laser 1310 nm	Laser 1310 nm
<b>Tx Power Level (dbm)</b>	<ul style="list-style-type: none"> <li>• -19 min</li> <li>• -14 max</li> </ul>	<ul style="list-style-type: none"> <li>• -15 min</li> <li>• -8 max</li> </ul>	<ul style="list-style-type: none"> <li>• 5 min</li> <li>• 0 max</li> </ul>
<b>Rx Power Level (dbm)</b>	<ul style="list-style-type: none"> <li>• -30 min</li> <li>• -14 max</li> </ul>	<ul style="list-style-type: none"> <li>• -28 min</li> <li>• -8 max</li> </ul>	<ul style="list-style-type: none"> <li>• -34 min</li> <li>• -10 max</li> </ul>
<b>Typical Reach (km)</b>	2	15	40

	MMF	SMF Intermediate Reach (SMF-IR)	SMF Long Reach (SMF-LR)
Redundancy	1:1	1:1	1:1
Line Protection	APS 1+1	APS 1+1	APS 1+1

### CISCO VXSM T3 INTERFACE

The Cisco VXSM T3 interface supports up to 6 ports. The Cisco VXSM T3 back cards are deployed in pairs; each supporting 3 T3 ports (Table 5).

**Table 5.** Cisco VXSM T3 Back-Card Interfaces

	T3
Port Speed	1.544 Mbps
Maximum Number of Ports Per Back Card	3
Number of Back Cards Per Front Card	1 or 2
Port Media	75-ohm Coax pair
Port Connector	3 pair of SMB Coax
Line Coding	Binary 8-zero substitution (B8ZS) or alternate mark inversion (AMI)
Line Framing	ANSI T1.408 Extended Superframe, Super Frame format line framing
Redundancy	1:1

### CISCO VXSM T1/E1 INTERFACE

The Cisco VXSM T1/E1 interface supports up to 48 ports. The Cisco VXSM T1/E1 back cards are deployed in pairs; each supporting 24 T1/E1 ports (Table 6).

**Table 6.** Cisco VXSM T1/E1 Back-Card Interfaces

	T1	E1
Port Speed	1.544 Mbps	2.048 Mbps
Maximum Number of Ports Per Back Card	24	24
Number of Back Cards Per Front Card	1 or 2	1 or 2
Port Media	100-ohm twisted pair	120-ohm twisted pair
Port Connector	50-pin Amphenol	50-pin Amphenol
Line Coding	Binary 8-zero substitution (B8ZS) or alternate mark inversion (AMI)	HDB3 or AMI
Line Framing	ANSI T1.408 Extended Superframe, Super Frame format line framing	ITU-T G.704 basic frame, multiframe, cyclic-redundancy-check (CRC) framing
Redundancy	1:1	1:1

## AVAILABILITY AND ORDERING

Table 7 provides availability and ordering information about the Cisco VXSM.

**Table 7.** Availability and Ordering Information for Cisco VXSM

Product Description	Part Number
Cisco VXSM OC-3/STM-1 Front Card	MGX-VXSM-155
Cisco VXSM OC-3/STM-1 Back Card	VXSM-BC-4-155
Cisco VXSM T3 Front Card	MGX-VXSM-T3
Cisco VXSM T3 Back Card	VXSM-BC-3T3
Cisco VXSM T1/E1 Front Card	MGX-VXSM-T1E1
Cisco VXSM T1/E1 Back Card	MGX-BC-24T1E1

## FOR MORE INFORMATION

For more information about Cisco service and support programs and benefits, go to: <http://www.cisco.com/>



### Corporate Headquarters

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
[www.cisco.com](http://www.cisco.com)  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

### European Headquarters

Cisco Systems International BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
[www-europe.cisco.com](http://www-europe.cisco.com)  
Tel: 31 0 20 357 1000  
Fax: 31 0 20 357 1100

### Americas Headquarters

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
[www.cisco.com](http://www.cisco.com)  
Tel: 408 526-7660  
Fax: 408 527-0883

### Asia Pacific Headquarters

Cisco Systems, Inc.  
168 Robinson Road  
#28-01 Capital Tower  
Singapore 068912  
[www.cisco.com](http://www.cisco.com)  
Tel: +65 6317 7777  
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on **the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).**

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus  
Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel  
Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal  
Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan  
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2005 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StrataView Plus, TeleRouter, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R) 205422.I\_ETMG\_JQ\_9.05